

CCI Link™ Remote Display

DESCRIPTION

The CCI Link Remote Display provides real-time control and monitoring of CCI Link compatible devices remotely and securely. View status, live parameter lists, alarms, warnings, and change controller settings with simple intuitive controls.

A bright easy to read wide angle display and sealed front panel buttons provide both environmental protection and precise control of any visible device on the network.



FEATURES

- Power supplied by the CCI Link connection eliminates the need for a separate power supply and wiring.
- IEC 61076-3-124 ix Industrial Ethernet Category 6 network cabling in 5, 15, and 25 foot lengths.
- IP Rated aluminum housing and sealed front panel controls.
- Connect up to 10 Remote Displays with up to 10 CCI Link devices*.
- Industry standard DIN mounting.
- CE and UL certified.




* When connected to a network containing a Control Concepts Connect Gateway Module the number of addressable CCI Link devices may be reduced by the Gateway. See the CCI Link Display manual for details.




DIMENSIONS

Dimensions:
Inches [mm]

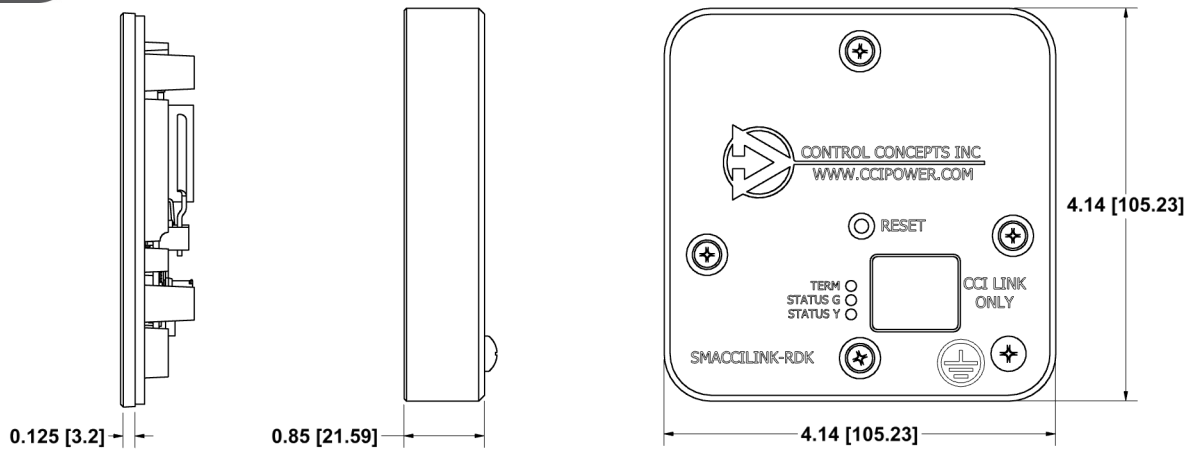

1/4" DIN Panel Mounting

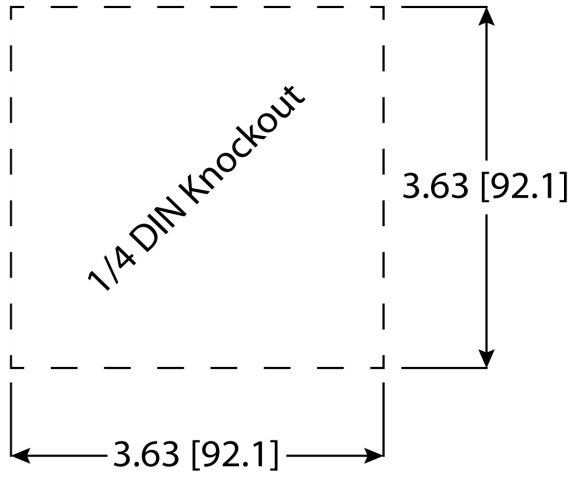

SPECIFICATIONS

Environmental	
Power Consumption	21 mA at 24 Vdc - powered from CCI Link™
Ambient Air Operating Temperature	32 °F [0 °C] - 122 °F [50 °C]
Humidity	20% to 90% RH Non-Condensing
Rated Operating Altitude	Up to 6000 ft [1829 m]
Contaminates	RoHS Compliant, CE Pollution Degree 2
Storage Temperature	-4 to 176 °F [-20 to 80 °C]
Ingress Protection Rating	IP 65
Mounting Options	Panel Mount (1/4 DIN knockout)

CONTACT / ORDERING INFORMATION

TEL: (952) 474 - 6200 | (800) 765 - 2799
 FAX: (952) 474 - 6070 | www.ccipower.com

8077 Century Blvd, Chanhassen, MN 55317, USA

